


VISIT...

LANZAROTE
Caliente.COM

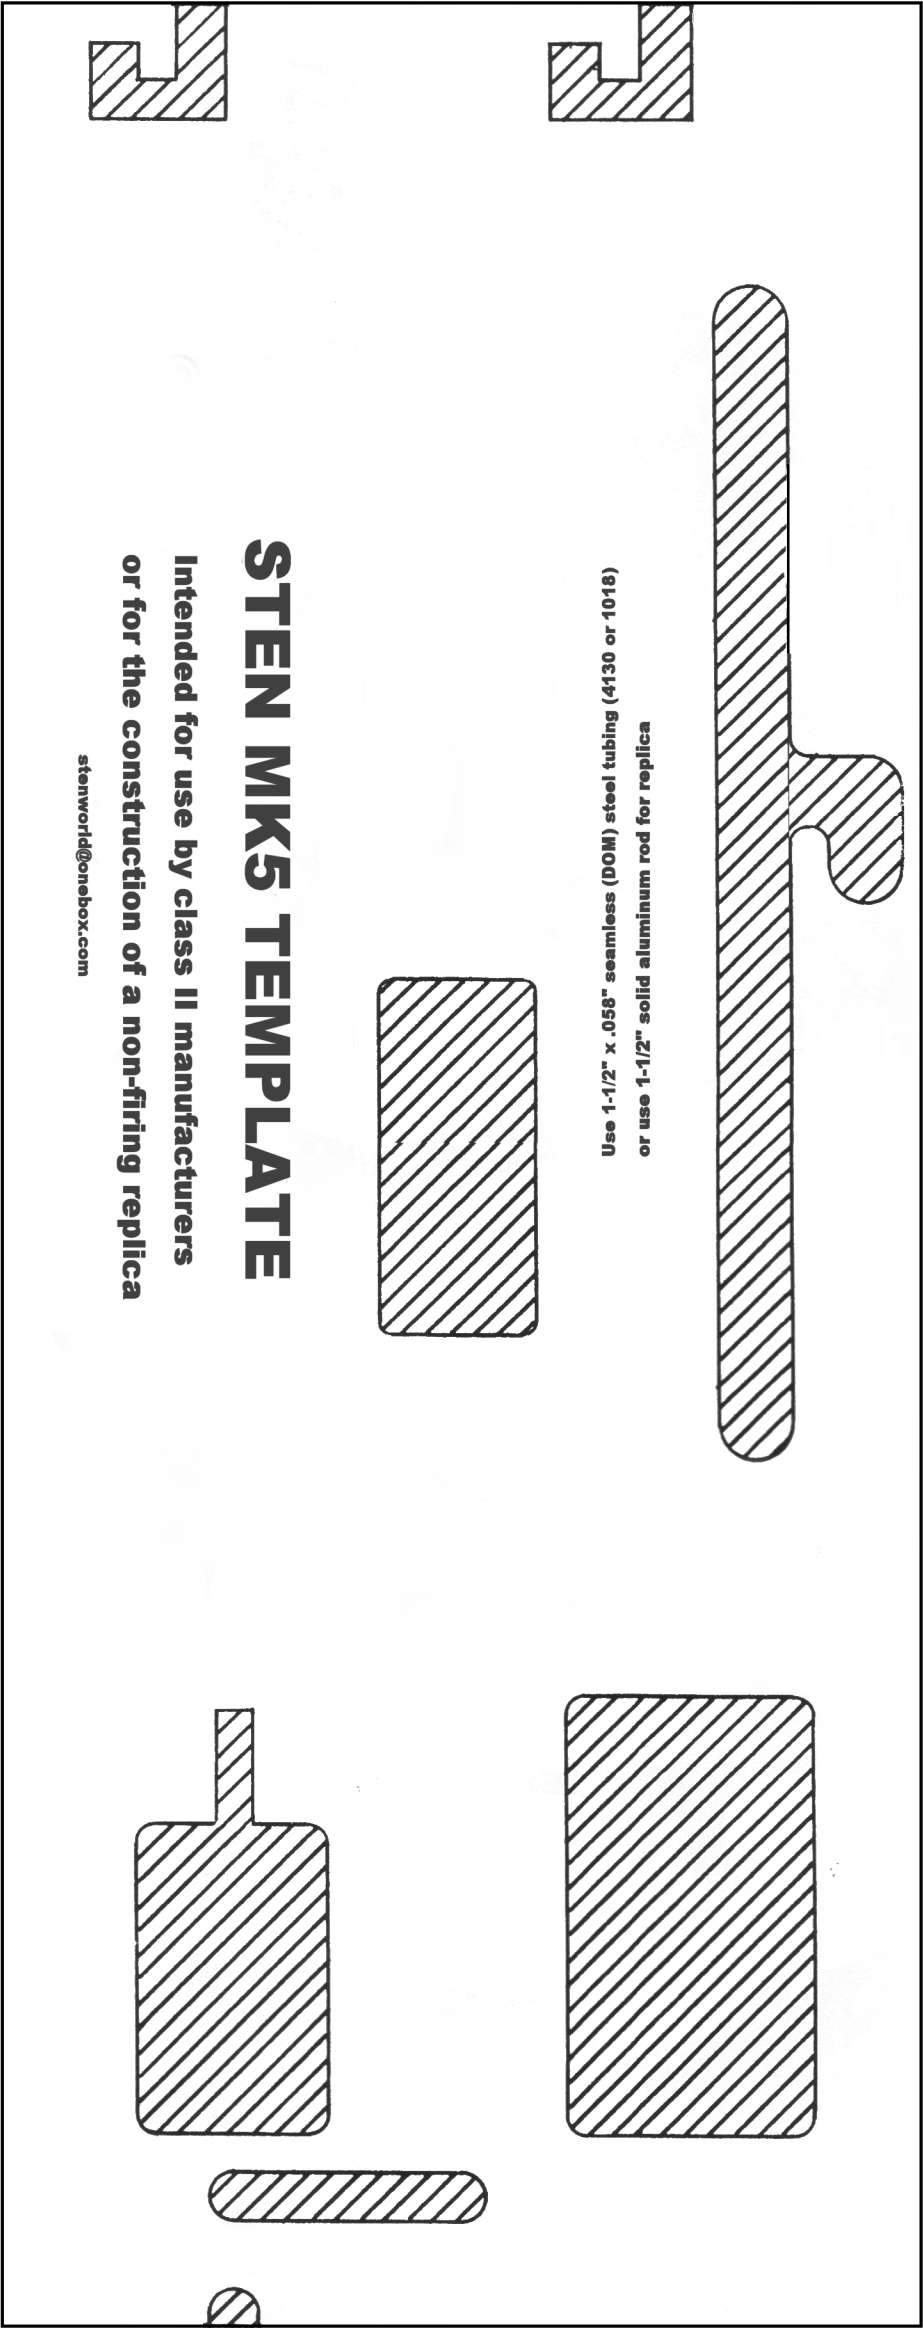

STEN MK5 TEMPLATE

Intended for use by class II manufacturers
or for the construction of a non-firing replica

stenworld@onebox.com

Use 1-1/2" x .058" seamless (DOM) steel tubing (4130 or 1018)
or use 1-1/2" solid aluminum rod for replica